

MAX Power



MAX POWER Diesel Generator Set


Diesel Generator set: A durable, high-quality diesel Genset designed for reliable power generation across various needs. It offers optional features such as soundproof canopies for quiet operation, making it suitable for both standby and continuous use in noise-sensitive areas.

General Specifications

Generating Set Model	Output Ratings	Electrical Output			
		Prime		Standby	
		KW	KVA	KW	KVA
MAX80	50 Hz, 1500 RPM	64	80	70	88

Engine

Standard Specifications

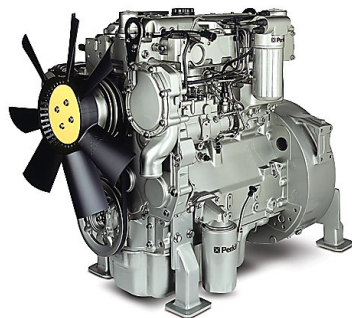

Engine	Perkins
Model	1104A-44TG2
Aspiration	Turbocharged
Governor	Mechanical
Silencer	Industrial
Number Of Cylinders	4 Vertical In-Line
Bore And stroke	105x127 mm
Displacement	4.4 Liters
Cycle	4 Stroke
Fuel System	Direct Injection
Compression Ratio	17.25:1
Rotation	Anti-Clockwise viewed on fly wheel
Total Oil Capacity	8 Liters
Cooling System	Water Cooled
Total Coolant Capacity	12.6 Liters

MAX Engineering FZCO



Jafza, Jebel Ali, UAE



+971 52 950 9863



info@maxengineering.ae



www.maxengineering.ae

ALTERNATOR

Standard Specifications

Alternator	LEROY SOMER
Model	TAL044 B
Number Of Bearings	1
Insulation Class	H
Protection Class	IP 23
Winding Pitch	2/3
Excitation System	12 Wires Shunt
Number Of Poles	4
Voltage	240 L-N, 415 L-L
No Of Phases	3
Rated Power Factor	0.8
Voltage Regulation	+/-1.0%
Over Speed	2250 PRM



**LEROYTM
SOMER**

Control System

Panel Equipment

Controller: Deep Sea DSE6120 MK III

Emergency Stop: Push Button

Circuit breaker: MCCB/ MCB

Start Switch: Off/On



Display

Voltage: (L-L / L-N) Volt

Current: (L1, L2, L3) Ampere

Frequency: Hz

Power Output: kVA, Kw

Engine Temperature: °C & °F

Oil pressure: PSI & Bar

Battery: DC Voltage

Charging: DC Voltage

Reactive Power: KVAr

Engine Running: Hours

LCD display: 132 x 64 mm

Protection

High engine temperature

Low Oil Pressure

Over Current

Over / Under frequency

Over / Under voltage

Battery charging failure

Start and Stop Failure

Emergency stop

Low and High Battery Voltage

Unbalanced load

Control

Control Genset

Start / Stop / Reset

Manual Operation Mode

Auto Operation Mode

Test Mode

Alarm / Mute

MAX Engineering FZCO



Jafza, Jebel Ali, UAE



+971 52 950 9863



info@maxengineering.ae



www.maxengineering.ae


Fuel Consumption

Fuel Consumption at 50% Load	9.70 (L/Hr)
Fuel Consumption at 75% Load	14.00 (L/Hr)
Fuel Consumption at 100% Load	18.70 (L/Hr)


Dimensions

Type	Dimensions (mm)			Genset Weight	Fuel Tank
	Length	Width	Hight	KG	Liter
Open Set	2100	700	1350	980	190
Soundproof	2850	1110	1590	1440	190

Sound pressure level at 7 meters 69 DBA

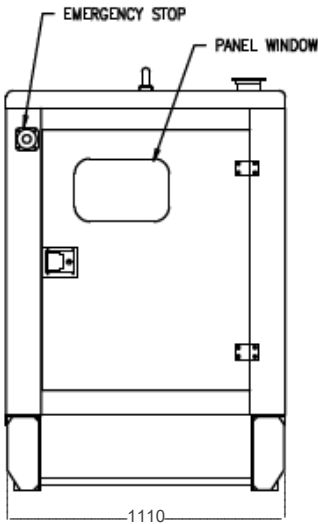

FRONT VIEW
(ALTERNATOR SIDE)

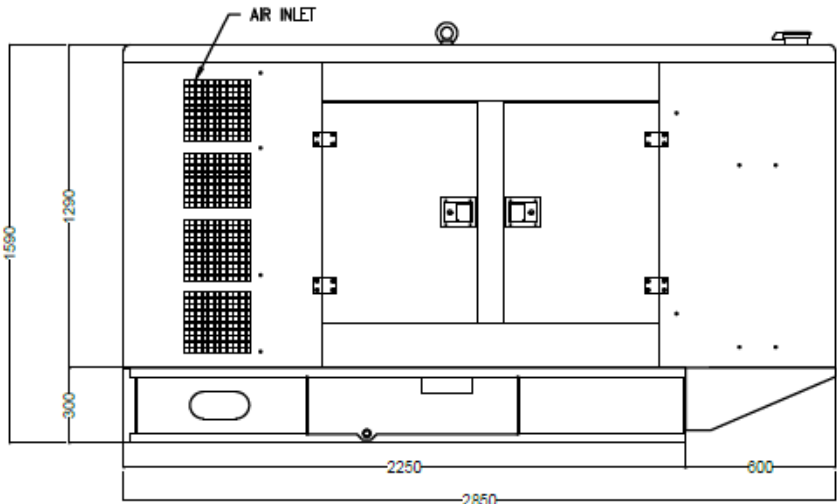

RIGHT SIDE VIEW



MAX Power Generating Sets Standards

MAX Gensets are engineered for efficient operation in harsh environments and desert conditions, with optimized ventilation for large spaces using CFD (Computational Fluid Dynamics) analysis. Each unit is rated in accordance with ISO 8528-1 standard conditions and complies with international standards, including BS5514 and ISO 3046 for diesel engine testing, as well as BS EN60034, BS 5000, VDE 0530, NEMA MG1-22, IEC 34, CSAC22.2-100, and AS 1359 for alternators.

Prime Power Ratings refer to supplying electric power with up to 10% overload capability available for 1 hour out of every 12 hours.

Standby Power Ratings apply when providing electricity during a power failure, and do not offer overload capability for these ratings.

Competitive edge :

Our canopy is designed for durability, performance, and ease of maintenance. It features an environment-resistant powder paint coating for long-lasting protection. All metal sheet bends are precisely formed using advanced CNC machinery, ensuring high structural integrity. The use of low-density foam enhances sound attenuation and helps maintain low internal temperatures.

The canopy design is based on detailed calculations and simulations for optimal efficiency. It also incorporates a reliable clamping and bolt system, making the canopy easily serviceable and user-friendly.

MAX Power

